

**PRV**PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

REC'D 10 JAN 2005

WIPO

PCT

**Intyg  
Certificate**

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande                      Astra Tech AB, Mölndal SE  
Applicant (s)

(21) Patentansökningsnummer    0303525-0  
Patent application number

(86) Ingivningsdatum                      2003-12-22  
Date of filing

Stockholm, 2004-12-29

För Patent- och registreringsverket  
For the Patent- and Registration Office

  
Gunilla Larsson

Avgift  
Fee

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

**PATENT- OCH  
REGISTRERINGSVERKET  
SWEDEN**

Postadress/Adress  
Box 5055  
S-102 42 STOCKHOLM

Telefon/Phone  
+46 8 782 25 00  
Vx 08-782 25 00

Telex  
17978  
PATOREG S

Telefax  
+46 8 666 02 86  
08-666 02 86

AWAPATENT AB

Kontor/Handläggare

Göteborg/Urban Lind/ULD

Ink. t. Patent- och reg.verket

2003 - 14 - 22

ASTRA TECH AB

Ansökningsnr

Vår referens

SE-21004623

Huvudfaxen Kassan 1

CATHETER ASSEMBLY WITH OSMOLALITY-INCREASING FLUIDField of the invention

The present invention relates to a catheter assembly of the type comprising a receptacle, a hydrophilic catheter and a wetting fluid. Further, the invention relates to a method for producing such a catheter assembly, as well as a wetting fluid and the use thereof for wetting of a hydrophilic surface layer. The invention also relates to a catheter as such.

Background of the invention

Catheters find their use in many different medical applications, such as urinary catheters for bladder drainage. Each catheter is normally pre-packed in a receptacle by the manufacturer, in order to maintain the catheter in a clean and preferably sterile condition.

A urinary catheter in general need to have a lubricant applied to the outer surface thereof to facilitate insertion into the urethra. Especially, for lubrication purposes, a hydrophilic urinary catheter may have a hydrophilic outer surface coating or layer which should be wetted by a fluid such as water for a certain time period prior to insertion of the catheter into the urethra of a patient. In order to facilitate the use and to improve cleanliness of the catheter, the assemblies have in recent years developed to comprise a rupturable wetting fluid pouch or container as well. Such assemblies are disclosed in e.g. WO 97/26937, WO 01/43807 and WO 98/11932.

Further, there has been a trend towards so-called "ready-to-use" catheters, where the catheter is arranged in the receptacle together with a wetting fluid in such a way that the catheter is maintained in a wetted, activated condition by said fluid. Such ready-to-use catheter assemblies are disclosed in e.g. WO 00/47494 and WO 98/19729.

A well-recognized problem with hydrophilic coatings or layers has been that the hydrophilic polymer surface may lose water and dry out when it comes in contact with e.g. a mucous membrane, such as when the catheter is inserted into the urethra. This occurs because of a difference between the osmotic potential of the hydrophilic surface and the osmotic potential of the mucous membrane. The mucous membrane has a higher osmotic potential, i.e. a higher salt concentration, than the hydrophilic surface. This difference in osmotic potential causes the water to go from the

2003 -14- 2 2

Huvudföreläsningen

2

hydrophilic surface layer to the mucous membrane so that the difference in the salt concentration will be counter-balanced. Naturally, this affects the low-friction properties of the hydrophilic outer surface coating, and may lead to pain and injuries of the patient.

- 5 For this reason, the present applicant has previously developed an improved hydrophilic coating, in which an osmolality-increasing compound was applied to a non-reactive hydrophilic polymer surface, thereby producing a more stable hydrophilic surface, as is disclosed in EP 217 771. Hereby, the theretofore prevailing problem of the hydrophilic coating drying out when inserted into the urethra, thus rendering the article insufficiently hydrophilic, was alleviated.

- 10 Similar hydrophilic coatings incorporating an osmolality-increasing compound are discussed in WO 94/16747 disclosing a process in which the osmolality-increasing compound is added during the process of applying the hydrophilic coating to the base material, EP 586 324 and EP 591 091 disclosing a hydrophilic coating comprising a non-dissolved, solid osmolality-increasing compound e.g. in the form of a powder or grain, and EP 991 702 disclosing a cross-linked hydrophilic coating comprising a water soluble osmolality-increasing compound.

- 20 However, these known methods and coatings are affected by some problems. For example, the production processes, involving different manners of incorporating the osmolality-increasing compounds in the coatings, are rather tedious cumbersome and costly. Further, the properties of the resulting, wetted hydrophilic surface coating to be inserted into the patient are, at least to a certain extent, affected by parameters of the wetting process, such as the quantity of wetting fluid used for the wetting, the constituents of the chosen wetting fluid, and the time period during which the wetting is carried through. Since several such parameters may be unknown beforehand, and may vary to a significant degree, the properties of the resulting, activated coating become unpredictable as well.

- 25 WO 00/47494 discloses a ready-to-use catheter product in which a wetting fluid is arranged in a receptacle in direct contact with a hydrophilic surface of a catheter, thereby continuously maintaining the hydrophilic surface in an activated state. This document discloses the use a saline solution as the wetting fluid. However, no information is given about any specific concentration of salt in the wetting fluid.

#### Summary of the invention

- 30 It is a general object of the present invention to alleviate the above-discussed problems.

Int. t. Patent- och reg.verket

2003 -14- 2 2

Huvudtexten Kassen

3

This object is achieved with a catheter assembly, a production method, a wetting fluid, and a method of use according to the appended claims.

According to a first aspect, there is provided a catheter assembly comprising: a wetting fluid; a catheter having on its surface, on at least an insertable part thereof, a hydrophilic surface layer providing low-friction surface character of the catheter by treatment with said wetting fluid; and a receptacle enclosing at least the insertable part of the catheter. The wetting fluid comprises at least one dissolved osmolality-increasing compound, wherein the total concentration of the dissolved osmolality-increasing compound(s) exceeds  $600 \text{ mOsm/dm}^3$ .

The unit milliosmole ( $\text{mOsm}$ ), i.e. one-thousandth of an osmole, represents the amount of substance that dissolves in a solvent to form one mole of osmotically active units (atoms, ions, etc), e.g., 1 mole of glucose, which is not ionizable, forms 1 osmole of solute, but 1 mole of sodium chloride forms 2 osmoles of solute.

The wetting fluid may be arranged in wetting contact with the hydrophilic surface layer or coating of the catheter in the receptacle, for preservation of the hydrophilic surface layer in a wetted state during accommodation in said receptacle, whereby a ready-to-use catheter assembly is provided. The assembly may also be such that the wetting fluid is initially kept separated from the hydrophilic surface layer of the catheter during storage of the assembly, and brought into contact with the hydrophilic surface layer upon activation before an intended use of the catheter.

This very high concentration of osmolality-increasing compound, exceeding  $600 \text{ mOsm/dm}^3$ , in the wetting fluid has, proven remarkably efficient. Specifically, the high concentration according to the invention is in line with the normal saline concentration in urine (which is about  $900 \text{ mOsm/dm}^3$ ) and is much higher than the concentration in a physiological saline solution (about  $290 \text{ mOsm/dm}^3$ ). It has surprisingly been found by the present inventors that when a such a high concentration is used for the wetting fluid, the properties of the resulting wetted hydrophilic layer is dramatically improved in respect of e.g. stability during use, stability during wetting, friction and water retention.

It has been found by the present inventors that such a high concentration leads to an extremely stable and reliable wetted hydrophilic surface, and no negative side-effects has been noted.

In a preferred embodiment, the total concentration of the osmolality-increasing compound(s) in the wetting fluid is exceeding  $700 \text{ mOsm/dm}^3$ , preferably exceeding  $800 \text{ mOsm/dm}^3$ .

Sv. t. Patent- och reg.verket

2003-12-22

Huvudfaxen Kassen

4

In an especially preferred embodiment the total concentration of the osmolality-increasing compound(s) in the wetting fluid solution is in the range of 850 mOsm/dm<sup>3</sup> to 950 mOsm/dm<sup>3</sup>, preferably about 900 mOsm/dm<sup>3</sup>.

5 It is preferred that the total concentration of the osmolality-increasing compound(s) in the wetting fluid is less than 1500 mOsm/dm<sup>3</sup>.

The osmolality-increasing compound(s) is/are preferably selected from the group consisting of urea, amino acids, mono and disaccharides, sugar alcohols, and non-toxic organic and inorganic salts or acids, polypeptides and mixtures thereof.

10 The present invention also encompasses embodiments in which one or more osmolality-increasing compound(s) are provided not only in the wetting fluid with the high concentration according to the inventive concept, but also in a hydrophilic layer on the catheter.

The present invention is particularly useful for urinary catheters, and especially for single-use urinary catheters intended for intermittent use.

15 The provision of one or more dissolved osmolality-increasing compounds in the wetting fluid provides several advantages. First of all, essentially the same advantages as achieved by adding osmolality-increasing compounds to the layer, also applies to the hydrophilic layer when wetted with a wetting fluid incorporating an osmolality-increasing compound. Accordingly, the hydrophilic coating in its state of use becomes more stable than if no osmolality-increasing compound was used, thereby rendering the hydrophilic coating less likely to dry out when inserted into the urethra and more capable of retaining its low friction characteristics.

20 Further, the addition of an osmolality-increasing compound to the wetting fluid is a relatively simple procedure, whereby the production becomes much more expedient and cost effective than in the previously known methods.

25 Still further, the properties of the hydrophilic layer as wetted with the wetting fluid incorporating one or more osmolality-increasing compounds are, in several aspects, superior and more reliable compared to the properties of a coating into which the osmolality-increasing compounds has been added. This is inter alia due to the fact that the steps leading to the final product, viz. the wetted, low-friction surface, are more predictable and determinable in case of the present invention. For example, the present invention gives the manufacturer full control of parameters such as the quantity of wetting fluid used for the wetting and the constituents of the chosen wetting fluid. In many previously known methods, it is often difficult to predict  
30 which wetting fluid the user will make use of, e.g. sterile water or ordinary local tap water, and thereby the constituents of said fluid. It is also difficult to predict what amount of fluid the user will use.

In addition, the properties of the hydrophilic coating as wetted with a wetting fluid comprising at least one dissolved osmolality-increasing compound are less dependent on the length of the time period during which the wetting occurs, compared to the properties of coatings into which the osmolality-increasing compounds are added. This is probably due to more homogenous conditions between the coating and the wetting fluid, in which a relatively stable equilibrium in respect of the osmolality-increasing constituents is reached as soon as the hydrophilic coating becomes impregnated with the wetting fluid. Hereby, the final product, viz. the wetted, low-friction surface, becomes more predictable and determinable when the present invention is used, since the sensitivity to human errors and the like is significantly reduced.

According to a second aspect, there is provided a wetting fluid for activation of a hydrophilic surface layer in order to produce a low-friction surface character of said hydrophilic surface layer by treatment by said wetting fluid. The wetting fluid comprises at least one dissolved osmolality-increasing compound, wherein the total concentration of the osmolality-increasing compound(s) exceeds  $600 \text{ mOsm/dm}^3$ . The wetting fluid may be used as an integrated part in a catheter assembly, i.e. forming part of the assembly during storage, as discussed in the foregoing. However, it may also be arranged separately, for use together with e.g. catheters packed without wetting fluid being attached.

Similar advantages are provided by this second aspect as already discussed in view of the first aspect. Also, the above-mentioned embodiments regarding e.g. concentration levels and compounds apply to this second aspect also. Specifically, the provision of at least one dissolved osmolality-increasing compound in the wetting fluid provides several advantages per se, such as improved properties of the hydrophilic layer, a more predictable and controllable wetting process, a more expedient and cost efficient production, etc. Further, the use of this very high concentration of osmolality-increasing compound(s) in the wetting fluid has, as is already discussed in the foregoing, proven remarkably efficient.

According to a third aspect, there is provided a method for producing a catheter assembly, said method comprising: providing a receptacle; providing a hydrophilic catheter; providing a wetting fluid; arranging at least an insertable part of the catheter in the receptacle and arranging said wetting fluid as a part of said catheter assembly, said wetting fluid comprising at least one osmolality-increasing compound, the total concentration of the osmolality-increasing compound(s) exceeding  $600 \text{ mOsm/dm}^3$ .

2003-12-22

Huvudskrift  
6

According to a fourth aspect of the invention, a catheter is provided, having on its surface, on at least an insertable part thereof, a hydrophilic surface layer for producing a low-friction surface character of the catheter by treatment with a wetting fluid, wherein the hydrophilic coating when wetted in preparation for an intended use  
5 incorporates at least one osmolality-increasing compound, and the total concentration of the osmolality-increasing compound(s) exceeds  $600 \text{ mOsm/dm}^3$ .

Similar advantages are provided by this aspect of the invention as already discussed in view of the previous aspects of the invention. Specifically, the use of this very high concentration of osmolality-increasing compound in the wetted hydrophilic  
10 surface layer has, as is already discussed in the foregoing, proven remarkably efficient.

The osmolality increasing compound(s) may be dissolved in the wetting fluid, and thereby incorporated into the hydrophilic surface during the wetting process, as is already discussed in relation to the other aspects in the foregoing. Alternatively,  
15 osmolality increasing compound(s) may be incorporated into the hydrophilic coating before the wetting, but of a concentration high enough to provide a dissolved concentration of the osmolality-increasing compound(s) when wetted in preparation for an intended use exceeding  $600 \text{ mOsm/dm}^3$ . For incorporation of the osmolality-increasing compound(s) into the coating, any one of the per se known methods  
20 discussed in the background section may be used, such as e.g. the method disclosed in EP 217 771. Further, a combination of said alternative ways of providing the osmolality-increasing compound(s) are also feasible, whereby the osmolality-increasing compound(s) prior to the wetting process is both incorporated into the wetting fluid and into the hydrophilic coating of the catheter, wherein the  
25 concentrations in the wetting fluid and in the hydrophilic coating, respectively, are high enough to provide a total dissolved concentration of the osmolality-increasing compound(s) in the hydrophilic coating when wetted in preparation for an intended use exceeding  $600 \text{ mOsm/dm}^3$ .

It is also possible to arrange all, or at least part of the osmolality-increasing compound(s) on the catheter or on other parts of the catheter assembly subsequently  
30 exposed to the wetting fluid, whereby the osmolality-increasing compound(s) will dissolve in the wetting fluid when brought in contact with each other.

A fifth aspect of the invention relates to a use of a wetting fluid solution for activation of a catheter having on its surface, on at least an insertable part thereof, a  
35 hydrophilic surface layer providing low-friction surface character of the catheter by treatment with said wetting fluid, wherein the wetting fluid comprises at least one





2003-14-22

Muvudfaxen Kassar

8

Fig. 6 is a partly broken side view of a sixth embodiment of a catheter assembly according to the invention, presenting a wetting fluid arranged in wetting contact with the hydrophilic surface layer, said embodiment in structure resembling a catheter assembly disclosed in WO 01/43807; and

- 5 Fig. 7 is a partly broken side view of a seventh embodiment of a catheter assembly according to the invention, presenting a wetting fluid arranged in wetting contact with the hydrophilic surface layer, said embodiment in structure resembling a catheter assembly disclosed in WO 00/47494.

#### Description of preferred embodiments

- 10 In the following detailed description preferred embodiments of the invention will be described. However, it is to be understood that features of the different embodiments are exchangeable between the embodiments and may be combined in different ways, unless anything else is specifically indicated. It may also be noted that, for the sake of clarity, the dimensions of certain components illustrated in the  
15 drawings may differ from the corresponding dimensions in real-life implementations of the invention, e.g. the length of the catheter, the dimensions of the fluid compartments, etc.

#### **The Catheter**

- 20 Hydrophilic catheters may be used for many different purposes, and for insertion into various types of body-cavities. However, the following discussion is in particular concerned with the preferred field of use, urinary catheters, even though the invention is not limited to this particular type of catheters.

- A catheter 130 as illustrated in the drawings, e.g. in Fig. 1, comprises a flared rearward portion 131 and an elongate shaft or tube 132 projecting forwardly from the rearward portion 131. An open-ended internal lumen (not shown) extends from the rear end of the rearward portion 131 to a drainage aperture 133 in a rounded tip 134 of the elongate tube 132. The rearward portion 131 may function as a connector of the catheter 130, being connectable to other devices, such as a urine collection bag, a drainage tube or the like.

- 30 At least a part of the elongate tube 132 forms an insertable length to be inserted through a body opening of the user, such as the urethra in case of a urinary catheter. By insertable length is normally, in the context of a hydrophilic catheter, meant that length of the elongate tube 132 which is coated with a hydrophilic material, for example PVP, and which is insertable into the urethra of the patient.

According to the invention, and applicable for the embodiments disclosed herein, the wetting fluid may be used for the wetting of many different types of well-known hydrophilic surfaces. For example, the catheter may be provided with a hydrophilic coating wherein the hydrophilic polymer coating comprises material selected from polyvinyl compounds, polysaccharides, polyurethanes, polyacrylates or copolymers of vinyl compounds and acrylates or anhydrides, especially polyethyleneoxide, polyvinyl-pyrrolidone, heparin, dextran, xanthan gum, polyvinyl alcohol, hydroxy propyl cellulose, methyl cellulose, copolymer of vinylpyrrolidone and hydroxy ethylmethyl acrylate or copolymer of polymethylvinyl ether and maleinic acid anhydride. The preferred hydrophilic polymer is polyvinylpyrrolidone.

The substrates may be made from any polymer material, which are well-known in the technical field and to which the said hydrophilic polymers adhere, such as polyurethanes, latex rubbers, other rubbers, polyvinylchloride, other vinyl polymers, polycsters and polyacrylates.

### The Wetting fluid

35 According to the invention, and in the embodiments disclosed herein, the wetting fluid serves the dual purposes of (i) wetting the hydrophilic surface coating, whereby a low-friction character of the surface is produced, and (ii) providing a dissolved osmolality-increasing compound to the wetted hydrophilic surface, thereby making the hydrophilic coating more stable and less likely to loose water and dry out

during use. To this end, the wetting fluid comprises at least one dissolved osmolality-increasing compound.

Several different osmolality-increasing compounds are feasible for incorporation into the wetting fluid. Preferably, the osmolality-increasing compound(s) is selected from the group consisting of urea, amino acids, mono and disaccharides, sugar alcohols, and non-toxic organic and inorganic salts or acids, polypeptides and mixtures thereof. Most preferably, the osmolality-increasing compound(s) is selected from the group consisting of glucose, sorbitol, sodium chloride, sodium citrate, sodium benzoate, calcium chloride, potassium chloride, potassium iodide and potassium nitrate.

The wetting fluid is preferably a water-based liquid, i.e. using water as a solvent.

The concentration of osmolality-increasing compound(s) is relatively high in the solution, and e.g. exceeding the concentration in physiological saline, i.e. about 300 mOsm/dm<sup>3</sup>. The total concentration of the osmolality-increasing compound(s) in the wetting fluid solution and/or in the hydrophilic coating when wetted in preparation for an intended use exceeds 600 mOsm/dm<sup>3</sup>. Further, the total concentration of the osmolality-increasing compound(s) preferably exceeds 700 mOsm/dm<sup>3</sup> and most preferably exceeds 800 mOsm/dm<sup>3</sup>. It is also preferred that the total concentration of the osmolality-increasing compound(s) is in the range 600-1500 mOsm/dm<sup>3</sup>, and preferably in the range 850 to 950 mOsm/dm<sup>3</sup>, and as a guiding value about 900 mOsm/dm<sup>3</sup>.

#### The Catheter assembly

With reference to Fig. 1, a first embodiment of a catheter assembly will now be described, the structure of which generally resembles embodiments previously disclosed in WO 97/26937, hereby incorporated by reference.

The catheter assembly 110 comprises a wetting receptacle or bag 120, preferably of a transparent flexible plastics material. The receptacle 120 has an elongate pocket 121 at its forward end. At its rearward end 122 the receptacle presents an opening. The wetting receptacle 120 is adapted for accommodation of at least the insertable length of the catheter tube 132 in the elongate pocket 121.

The catheter assembly 110 further comprises a hydrophilic urinary catheter 130, as is discussed in more detail in the foregoing.

The catheter assembly 110 comprises a wetting fluid 150 forming part of the assembly 110, i.e. the wetting fluid is not provided completely separate from the assembly. More specifically, in the embodiment in Fig. 1, the catheter assembly 110

2003-14-22

Huyudfaxen Kasean

11

further comprises a wetting fluid container 140, in which the wetting fluid 150 is kept separated from the hydrophilic surface of the catheter 130 during storage.

5 The wetting fluid container 140 is openable, in order to enable activation of the catheter assembly. Thus, the activation is performed by opening the container and releasing the wetting fluid into the wetting receptacle 120 so that it comes into contact with the hydrophilic coating of the catheter 130. The wetting fluid container 140 may be openable by means of pressing, tearing, piercing, twisting, etc, which is per se well-known in the art. The wetting fluid 150 is discussed in more detail in the foregoing.

10 The wetting receptacle 120 preferably forms a sealed compartment around the catheter 3 and at least part of the wetting fluid container 140.

The wetting receptacle 120 preferably comprises opening means for facilitating opening of the receptacle in order to expose the catheter 130 for use. The opening means may comprise a tear line 123 connected to a gripping handle 124, such as a pulling tab. Hereby, the user may pull the gripping handle 124 and, thereby, 15 tearing open the side wall of the wetting receptacle 120. Additionally, or alternatively, a gripping handle may be arranged in the opposite end of the tear line 123. However, alternative opening means are also feasible, such as tear-lines arranged in different fashions and locations, peel-off joints, etc.

20 In a method of wetting the catheter 130 according to the embodiment in Fig. 1, the user first activates the catheter 130 by opening the wetting fluid container 140 within the bounds of the wetting receptacle 120, thereby releasing the wetting fluid from the container 140 into the wetting receptacle 130. After a sufficient wetting period, the wetting receptacle 120 is opened, in order to expose the catheter 130 for 25 insertion into a patient.

In the embodiment in Fig. 1, the wetting receptacle 120 also serves as a urine collection bag. Thus, being opened, the receptacle 120 maintains connected to the catheter 120 for receiving the drained urine from the bladder.

30 With reference to Fig. 2, a second embodiment of a catheter assembly will now be described, the structure of which resembling catheter assemblies disclosed in WO 01/43807, hereby incorporated by reference.

In this embodiment, the wetting receptacle 220 is adapted for accommodation of only the catheter tube 232 in the elongate pocket 221, whereas the opening end 222 of the wetting receptacle 220 is sealingly connected to and closed by the connector or rearward end 231 of the catheter 230. Hereby, the receptacle 220 encloses the 35 insertable length of the catheter 230, but leaves a part of the catheter 230 outside the receptacle 220.

2003-12-24

Huvudfaxen Kase

12

In the embodiment in Fig. 2, the wetting fluid container 240 enclosing the wetting fluid 250 is formed as a separate compartment of the wetting receptacle 220. A rupturable separation wall 241 is arranged between this receptacle compartment 240 holding the wetting fluid 250 and the receptacle compartment holding the catheter 230, i.e. the elongate pocket 221. The separation wall 241 may be provided by arranging a peelable joint between the compartments.

In a method of activating the catheter 230, the user applies a compressing force to the wetting fluid container 240 in such a way that the rupturable separation wall 241 is opened and the wetting fluid 250 is introduced into the catheter-holding compartment 221 of the wetting receptacle 220. It may be noted that the sealingly connection at the opening end 222 with the connector 231 maintains the wetting fluid 250 in the catheter-holding compartment 221. After release of the wetting fluid into the catheter compartment 221 and when the catheter has been activated, the receptacle 220 may be opened in order to expose the catheter 230 for use. The wetting receptacle 220 may either be ripped off from the wetted catheter 230 before use of the catheter and then disposed of, or be maintained connected to the catheter 230 during use.

With reference to Fig. 3, a third embodiment of the catheter assembly will now be described. In this embodiment, the catheter assembly generally corresponds to the second embodiment in Fig. 2, the structure resembling catheter assemblies disclosed in WO 01/43807. In this case, however, the wetting fluid container 340 holding the wetting fluid 350 is formed as a separate compartment being separated from, and arranged outside the receptacle. However, in accordance with the inventive concept, the wetting fluid 350 and the fluid container 340 still forms part of the overall catheter assembly as such, i.e. are "assembled" with the other components. The fluid container 340 is arranged on and is maintained by the catheter connector 331, and a fluid connection between the fluid container and the catheter compartment is prevented by a rupturable separation wall 341.

For activation of the catheter, the user applies e.g. a compressing force to the separate wetting container 340 in such a way that the rupturable separation wall 341 is opened and wetting fluid is introduced into the catheter compartment via the connector and through the catheter lumen. Preferably, the wetting container contains a sufficient amount of wetting fluid for the insertable length of the catheter to be sufficiently wetted.

With reference to Figs 4a and 4b, a fourth embodiment of the catheter assembly will now be described. Also in this embodiment, the catheter assembly in structure resembles catheter assemblies disclosed in WO 01/43807. The catheter

## Huvudfaxen Kassen

assembly 410 comprises a wetting receptacle or bag 420. As in the previously discussed embodiments, the catheter assembly comprises a hydrophilic catheter, and preferably a urinary catheter 430. The wetting receptacle encloses at least the insertable length of the catheter 430, but leaves at least part of the catheter 430 outside the wetting receptacle 420, said part comprising the connection interface. The assembly also comprises a wetting fluid container 440 containing a wetting fluid 450. In this embodiment, the wetting fluid container 440 is formed in a compartment of the wetting receptacle being separated from the compartment accommodating the catheter 430. The wetting fluid container 440 is arranged in a part of the receptacle extending rearward from the catheter 430, i.e. rearward of the connector part thereof. Said rearward part of the wetting receptacle 420 is preferably in fluid communication with the forward part housing the catheter 430. The wetting fluid compartment 440 is separated from the compartment holding the catheter 430 by means of a rupturable separation wall 441.

The wetting fluid 450 may be discharged into the other compartment of the receptacle by compressing the wetting fluid container 440, and/or by applying a pulling force between the end parts of the assembly.

In order to achieve a stronger and preferably gas impermeable wetting fluid compartment, it is preferred to arrange an additional cover 460 around said compartment 440. This additional cover 460 may be arranged on the inside of the wetting fluid compartment 440 formed in the receptacle 420, but is preferably arranged as an outer cover 460 arranged over the part of the receptacle 420 forming the wetting fluid compartment 440, as illustrated in Fig. 4.

For activation of the catheter 430 in Fig. 4, the user applies e.g. a compressing force to the wetting fluid compartment 440, thereby forcing open the separation joint 441 and discharging the wetting fluid into the catheter compartment, as is illustrated in Fig. 4b. Preferably, the wetting fluid container 440 contains a sufficient amount of wetting fluid 450 for the insertable length of the catheter to be sufficiently wetted. After release of the wetting fluid into the catheter compartment, the wetting receptacle 120 may be opened, e.g. at the distal end thereof, as is discussed above, for insertion of the catheter.

With reference to Fig. 5, a fifth embodiment of the catheter assembly will now be described. This embodiment resembles to a large extent the embodiment discussed with reference to Fig. 4, and also resembles the structure of some embodiments discussed in WO 01/43807 . The most important differences between the embodiments in Fig. 4 and Fig. 5 are that the entire catheter is enclosed in the

Ink. t. Patent- och reg.verket

2003-12-22

14

Huvudfaxen Kassa

receptacle in the embodiment in Fig. 5, and that the wetting fluid compartment is configured somewhat differently.

More specifically, in the embodiment illustrated in Fig. 5, two sheets of outer cover material is arranged over the part of the wetting receptacle forming the wetting fluid container. Preferably, the outer cover material sheets are dimensioned  
5 essentially only to cover the wetting fluid container part of the receptacle.

Further, the separation between the wetting fluid compartment and the cavity accommodating the catheter provides a rupturable sealed closure 451, in which it is provided at least one point of weakness, in order for an induced rupture to occur in a  
10 predetermined position, thereby enabling fluid communication between the wetting fluid compartment and the compartment housing the catheter. In this embodiment this is achieved by means of a non-linear geometrical arrangement of the joint together with a weld width variation. The joint is here arranged with a knee directed towards the wetting fluid compartment. The knee has an angled peak portion directed towards  
15 the wetting fluid compartment. Further, this effect is supported and increased by an advantageously arranged width variation of the weld. Accordingly, the two parameters, weld width and geometrical arrangement, cooperates to form a very predictable and easily ruptured separation wall.

The method of activation of the catheter according to this embodiment  
20 resembles the wetting process discussed with reference to Fig. 4. After release of the wetting fluid into the catheter compartment, the wetting receptacle may be opened, e.g. at the distal end thereof, as is discussed above, for insertion of the catheter.

With reference to Fig. 6, a sixth embodiment of an catheter assembly will now be described. In this embodiment, the catheter assembly generally corresponds to the  
25 previously disclosed embodiments, and in particular to the second and third embodiments. Further, this embodiment in structure resembles catheter assemblies disclosed in WO 01/43807. In this embodiment, the wetting fluid container 640 is not formed in a separate compartment of the receptacle, but is integrated with the compartment holding the catheter. Hereby, the catheter is activated already during  
30 production, and is then maintained in a activated, ready-to-use condition. Thus, in this embodiment, the hydrophilic surface layer is preserved in a wetted state during accommodation in the receptacle and a ready-to-use catheter assembly is provided. In order to preserve this wetted condition the compartment formed by the receptacle and the catheter is preferably gas sealed, and further, the receptacle is preferably gas  
35 impermeable.

In use, the receptacle is simply opened, and the catheter could immediately be introduced into the patient.

Like in the embodiment in Fig. 6, this embodiment relates to a catheter assembly 710 in which the wetting receptacle 720 encloses the wetting fluid 750 and the catheter 730 in such a way that the wetting fluid is in direct wetting contact with the hydrophilic surface of the catheter during storage, i.e. the catheter is continuously kept in an activated state. However, in this embodiment the receptacle is formed to enclose the entire catheter.

Previously known friction measurement methods for catheters do not take into consideration the special circumstances and conditions prevailing in the urethra. Accordingly, said methods fail to provide reliable information on the extraction force actually needed for removal of catheters in the use situation and, consequently, also fail to provide information on the possible pain and suffer the patient may endure.

To this end, an improved measuring method involving an artificial urethra, as discussed in more detail in the following, is hereby proposed by the present inventors.

- the pressure in the urethra, which is normally between 2.4-13.7 kPa.
- the concentration relations.
- the catheterization time period.

In the measuring method, the mucous membrane of the urethra is simulated with an artificial urethra, accomplished by means of a dialysis membrane formed as a tube. For the measurement, the catheter is placed in the membrane, and the entire assembly is placed in a saline solution with the same concentration of osmolality increasing compound as in ordinary urine, and maintained in said solution during a



2003-14-22

Huvudfaxen Kassen

16

time period corresponding to the catheterization time period. Subsequently, a pressure is applied to the catheter by means of the artificial urethra to form a constant pressure, said pressure being established with applied air pressure. The force required for the withdrawal of the catheter is measured by means of a dynamometer or the like. The measured force is a measure on the extraction force required to withdraw the catheter from a urethra in the actual use situation, and is therefore also a measure on the friction between the urethra and the catheter surface.

It has been found that the results of said measuring method provide a very good conformity with other measurements performed on urethras in vitro, as well as with in vivo measurements.

The measuring device simulating the urethra comprises a dialysis membrane formed as a tube, into which the catheter may be introduced. The pore size of the dialysis membrane is preferably chosen to be approximately MWCO (Molecular Weight Cut Off) 500 Dalton. For example, the dialysis membrane Spectra/Por® CE (Cellulose Ester) membrane MWCO 500 may be used. The membrane provides a gel-like surface when wetted, which provides a good resemblance with the mucous membrane of the urethra.

Pressure applying means are arranged around the inner tube made of dialysis membrane. These pressure applying means may comprise an outer tube of a relatively rigid material arranged coaxially outside the inner tube, and an inflatable bag arranged between the inner and outer tubes. The inflatable bag could be made of a plastic film, e.g. EBA foil (polyethylene butyl acrylate). Pressure regulating means, such as a pump, and pressure sensing means are connectable to the inflatable bag for controlling the pressure applied to the catheter through the dialysis membrane.

For the measurement, the catheter is wetted as in ordinary use, and thereafter placed in the membrane.

The entire assembly is then placed in a saline solution with a salt concentration resembling the one in ordinary urine. The solution preferably comprises NaCl, and the concentration is preferably about 3.0 % of weight. However, even other values could be used, such as 4 % of weight NaCl, or 0 % of weight NaCl, i.e. distilled water, in order to simulate extreme situations.

The assembly is maintained in said solution during a time period corresponding to the catheterization time period to be measured, which is normally in the range 0.5-10 minutes, and preferably about 5 minutes. For measurements of short time periods, the dialysis membrane may even be pre-wetted with the saline solution before the introduction of the catheter.



2003-14-22

Huvudfaxen Kasse

Table 1: Measurement of extraction force from an artificial urethra for catheters wetted in different wetting fluid solutions

Catheter type, and concentration of the osmolality increasing compound in the wetting fluid	Extraction force (N)	Standard deviation
LoFric®, about 500 mOsm/dm <sup>3</sup>	1.8	0.41
LoFric®, about 700 mOsm/dm <sup>3</sup>	0.9	0.21
LoFric®, about 900 mOsm/dm <sup>3</sup>	0.9	0.19
Speedicath®, about 500 mOsm/dm <sup>3</sup>	3.3	1.20
Speedicath®, about 700 mOsm/dm <sup>3</sup>	2.1	0.80
Speedicath®, about 900 mOsm/dm <sup>3</sup>	2.0	0.84

5

As is clearly evident from the measurements illustrated in table 1, there is a dramatic improvement and decrease in the required extraction force when wetting fluids having an osmolality level of 700 mOsm/dm<sup>3</sup> or above is used, compared to when a level of 500 mOsm/dm<sup>3</sup> is used. This effect is clearly visible in both the catheter types discussed above, and on which the experimental testing were conducted.

10

#### Conclusion and summary

In the foregoing, a catheter assembly has been disclosed comprising: a hydrophilic catheter; a wetting fluid for wetting of the catheter; and a receptacle enclosing at least the insertable part of the catheter. Further, the wetting fluid comprises at least one dissolved osmolality-increasing compound, wherein the total concentration of the dissolved osmolality-increasing compound(s) is very high, exceeding 600 mOsm/dm<sup>3</sup>. The wetting fluid could either be arranged in contact with the hydrophilic surface layer of the catheter in the receptacle, for preservation of the hydrophilic surface layer in a wetted state during accommodation in said receptacle and provision of a ready-to-use catheter assembly, or be arranged to keep the wetting fluid separated from the hydrophilic surface layer of the catheter during storage, but to be brought into contact with said hydrophilic surface layer upon activation before an intended use of the catheter. A similar method, use, catheter and wetting fluid are disclosed as well.

20  
25

The provision of at least one osmolality-increasing compound in the wetting fluid provides several advantages per se, such as a improved properties of the hydrophilic coating, a more predictable and controllable wetting process, a more

2003-12-22

Huvudfaxen Kassen

expedient and cost efficient production, etc. Further, the use of the inventive very high concentration of osmolality-increasing compound(s) in the wetting fluid has proven remarkably efficient.

The invention has now been discussed in relation to different embodiments.

- 5 However, it should be appreciated by those versed in the art that several further alternatives are possible. For example, the features of the different embodiments discussed above may naturally be combined in many other ways.

- 10 It is further possible to use the invention for other types of catheters than urinary catheters, such as vascular catheters or the like. It is also possible to use many different types of osmolality-increasing compounds in the wetting fluid, either alone or in different combinations. Many different levels of concentration of the osmolality-increasing compounds above 600 mOsm/dm<sup>3</sup> are also feasible, even though the higher levels proposed in the foregoing are normally more advantageous.

- 15 Still further, it is possible to arrange the wetting fluid container in many different ways. For example, the container may be a separate container, but forming part of the assembly. Such a wetting fluid container may be arranged completely inside the receptacle, partly inside the receptacle, or completely outside the receptacle. Alternatively, the wetting fluid container may be an integrated compartment of the receptacle. This compartment may be separated from the  
20 compartment housing the insertable part of the catheter, or be integrated with such a compartment. In the latter case, the catheter may be maintained in a wetted, activated state.

- Further, the wetting fluid container may be arranged close to the distal part of the catheter, close to the proximal part of the catheter, or in any other suitable  
25 location in the assembly. In case the wetting fluid is arranged separately from the insertable part of the catheter, the separation wall or joint could e.g. be a breakable or peelable membrane wall, but alternative embodiments are naturally feasible, such as various types of detachable or openable caps or closings. The wetting fluid container may be arranged to be discharged upon application of a twist, a compression, a pull or  
30 the like on the fluid container. Preferably the wetting fluid may be discharged without breaking or rupturing the receptacle, even though this may not be necessary, depending on the intended use, etc.

Many different materials could also be used for the different parts of the catheter assembly.

- 35 It will be appreciated by those versed in the art that several such alternatives similar to those described above could be used without departing from the spirit of the

FROM

(MANDEC 22 2003 14:58/ST. 14:54/NO. 8490571837 P. 22  
S. Patent- och reg.verket

2003-12-22

Huvudfaxen Kassen

20

invention, and all such modifications should be regarded as a part of the present  
invention, as defined in the appended claims.

9  
8  
7  
6  
5  
4  
3  
2  
1

2003 -14- 2 2

## CLAIMS

## Huyudfoxen Kennan

2. The catheter assembly as claimed in claim 1, wherein the wetting fluid (650; 750) is arranged in wetting contact with the hydrophilic surface layer of the catheter (630; 730) in the receptacle (620; 720), for preservation of the hydrophilic surface layer in a wetted state during accommodation in said receptacle and provision of a ready-to-use catheter assembly.

3. The catheter assembly as claimed in claim 1, wherein said assembly presents a storage state in which the wetting fluid (150; 250; 350; 450) is kept separated from the hydrophilic surface layer of the catheter (130; 230; 330; 430), and an activation state in which the wetting fluid is brought into contact with said hydrophilic surface layer before an intended use of the catheter.

25 4. The catheter assembly as claimed in any one of the preceding claims, wherein the total concentration of the osmolality-increasing compound(s) in the wetting fluid (150; 250; 350; 450; 650; 750) exceeds 700 mOsm/dm<sup>3</sup>, and preferably exceeds 800 mOsm/dm<sup>3</sup>.

30 5. The catheter assembly as claimed in any one of the preceding claims, wherein the total concentration of the osmolality-increasing compound(s) in the wetting fluid (150; 250; 350; 450; 650; 750) is in the range of 850 to 950 mOsm/dm<sup>3</sup>, and preferably about 900 mOsm/dm<sup>3</sup>.

35 6. The catheter assembly as claimed in any one of the preceding claims, wherein the total concentration of the osmolality-increasing compound(s) in the wetting fluid (150; 250; 350; 450; 650; 750) is less than 1500 mOsm/dm<sup>3</sup>.

7. The catheter assembly as claimed in any one of the preceding claims,  
wherein said osmolality-increasing compound(s) is/are selected from the group  
consisting of urea, amino acids, mono and disaccharides, sugar alcohols, and non-  
5 toxic organic and inorganic salts or acids, polypeptides and mixtures thereof.

8. The catheter assembly as claimed in claim 7, wherein said osmolality-  
increasing compound(s) is/are selected from the group consisting of glucose, sorbitol,  
sodium chloride, sodium citrate, sodium benzoate, calcium chloride, potassium  
10 chloride, potassium iodide and potassium nitrate.

9. The catheter assembly as claimed in any one of the preceding claims,  
wherein the said wetting fluid (150; 250; 350; 450; 650; 750) further comprises a  
polymer.

10. The catheter assembly as claimed in any one of the preceding claims,  
wherein the wetting fluid (150; 250; 350; 450; 650; 750) is a water-based liquid.

11. The catheter assembly as claimed in any one of the preceding claims,  
20 wherein the catheter is a urinary catheter (130; 230; 330; 430; 630; 730) intended for  
intermittent use.

12. The catheter assembly as claimed in any one of the preceding claims,  
wherein said wetting receptacle (120; 420; 720) encloses the entire catheter (130;  
25 430; 730).

13. The catheter assembly as claimed in any one of the preceding claims,  
wherein said receptacle (220; 420; 620; 720) entirely encloses said wetting fluid.

14. The catheter assembly as claimed in any one of the preceding claims,  
30 further comprising a separate wetting fluid container, which encloses said wetting  
fluid (150; 250; 350; 450; 650; 750) and which forms part of said catheter assembly.

15. A wetting fluid (150; 250; 350; 450; 650; 750) for activation of a  
35 hydrophilic surface layer in order to produce a low-friction surface character of said  
hydrophilic surface layer by treatment by said the wetting fluid,  
c h a r a c t e r i z e d in that the wetting fluid (150; 250; 350; 450; 650; 750)

2003 -14- 2 2

## Huyudfaxen Kassen

23

comprises at least one dissolved osmolality-increasing compound, wherein the total concentration of the osmolality-increasing compound(s) exceeds 600 mOsm/dm<sup>3</sup>.

16. The wetting fluid as claimed in claim 15, wherein the total concentration  
5 of said osmolality-increasing compound(s) in the wetting fluid (150; 250; 350; 450;  
650; 750) exceeds 700 mOsm/dm<sup>3</sup>, and preferably exceeds 800 mOsm/dm<sup>3</sup>.

17. The wetting fluid as claimed in claim 15, wherein the total concentration of said osmolality-increasing compound(s) in the wetting fluid (150; 250; 350; 450; 650; 750) is in the range of 850 to 950 mOsm/dm<sup>3</sup>, preferably about 900 mOsm/dm<sup>3</sup>.

18. The wetting fluid as claimed in any one of claims 15-17, wherein the total concentration of said osmolality-increasing compound(s) in the wetting fluid (150; 250; 350; 450; 650; 750) is less than 1500 mOsm/dm<sup>3</sup>.

15

19. The wetting fluid as claimed in any one of claims 15-18, wherein said osmolality-increasing compound(s) is/are selected from the group consisting of urica, amino acids, mono and disaccharides, sugar alcohols, and non-toxic organic and inorganic salts or acids, polypeptides and mixtures thereof.

20

20. The wetting fluid as claimed in any one of claims 15-19, wherein the wetting fluid (150; 250; 350; 450; 650; 750) is a water-based liquid.

25 21. A method for producing a catheter assembly, comprising:  
providing a receptacle (120; 220; 320; 420; 620; 720);  
providing a hydrophilic catheter (130; 230; 330; 430; 630; 730);  
providing a wetting fluid (150; 250; 350; 450; 650; 750);  
arranging at least an insertable part of the catheter in the receptacle (120; 220;  
320; 420; 620; 720) and arranging said wetting fluid (150; 250; 350; 450; 650; 750)  
30 as a part of said catheter assembly;  
said wetting fluid (150; 250; 350; 450; 650; 750) comprising at least one  
dissolved osmolality-increasing compound, the total concentration of the osmolality-  
increasing compound(s) exceeding 600 mOsm/dm<sup>3</sup>.

35

22. The method as claimed in claim 21, wherein the total concentration of the osmolality-increasing compound(s) in the wetting fluid (150; 250; 350; 450; 650; 750) exceeds 700 mOsm/dm<sup>3</sup>, and preferably exceeds 800 mOsm/dm<sup>3</sup>.



Ink. t. Patent- och reg.verket  
2003-12-22  
Muvudfaxen Kanan

24

23. The method as claimed in claim 21, wherein the total concentration of the osmolality-increasing compound(s) in the wetting fluid (150; 250; 350; 450; 650; 750) is in the range of 850 to 950 mOsm/dm<sup>3</sup>, and preferably about 900 mOsm/dm<sup>3</sup>.

5

24. The method as claimed in any one of claims 21-23, wherein the total concentration of the osmolality-increasing compound(s) in the wetting fluid (150; 250; 350; 450; 650; 750) is less than 1500 mOsm/dm<sup>3</sup>.

10

25. The method of any one of the claims 21-24, wherein the osmolality-increasing compound is selected from the group consisting of urea, amino acids, mono and disaccharides, sugar alcohols, and non-toxic organic and inorganic salts or acids, polypeptides and mixtures thereof.

15

26. The method of any one of the claims 21-25, wherein the wetting fluid (150; 250; 350; 450; 650; 750) is a water-based liquid.

27. A catheter (130; 230; 330; 430; 630; 730) having on its surface, on at least an insertable part thereof, a hydrophilic surface layer for producing a low-friction surface character of the catheter by treatment with a wetting fluid (150; 250; 350; 450; 650; 750), characterized in that the hydrophilic coating when wetted in preparation for an intended use incorporates at least one osmolality-increasing compound, wherein the total concentration of the osmolality-increasing compound(s) exceeds 600 mOsm/dm<sup>3</sup>.

25

28. The catheter as claimed in claim 27, wherein the total concentration of the osmolality-increasing compound(s) in the wetting fluid (150; 250; 350; 450; 650; 750) exceeds 700 mOsm/dm<sup>3</sup>, and preferably exceeds 800 mOsm/dm<sup>3</sup>.

30

29. The catheter as claimed in claim 27 or 28, wherein the total concentration of the osmolality-increasing compound(s) in the wetting fluid (150; 250; 350; 450; 650; 750) is in the range of 850 to 950 mOsm/dm<sup>3</sup>, and preferably about 900 mOsm/dm<sup>3</sup>.

35

30. The catheter as claimed in any one of claims 27-29, wherein the catheter is a urinary catheter (130; 230; 330; 430; 630; 730) intended for intermittent use.

31. Use of a wetting fluid solution (150; 250; 350; 450; 650; 750) for activation of a catheter (130; 230; 330; 430; 630; 730) having on its surface, on at least an insertable part thereof, a hydrophilic surface layer providing low-friction surface character of the catheter by treatment with said wetting fluid,

5 characterized in that the wetting fluid (150; 250; 350; 450; 650; 750) comprises at least one dissolved osmolality-increasing compound, wherein the total concentration of the dissolved osmolality-increasing compound(s) exceeds 600 mOsm/dm<sup>3</sup>.

32. The use as claimed in claim 31, wherein the total concentration of the osmolality-increasing compound(s) in the wetting fluid (150; 250; 350; 450; 650; 750) exceeds 700 mOsm/dm<sup>3</sup>, and preferably exceeds 800 mOsm/dm<sup>3</sup>.

33. The use as claimed in claim 31 or 32, wherein the total concentration of the osmolality-increasing compound(s) in the wetting fluid (150; 250; 350; 450; 650; 750) is in the range of 850 to 950 mOsm/dm<sup>3</sup>, and preferably about 900 mOsm/dm<sup>3</sup>.

Sv. t. Patent- och reg.verket

2003-12-22

Huvudfaxen Kassen

26

## ABSTRACT

- A catheter assembly is disclosed comprising: a hydrophilic catheter; a wetting fluid for wetting of the catheter; and a receptacle enclosing at least the insertable part of the catheter and the wetting fluid. Further, the wetting fluid is a solution incorporating at least one osmolality-increasing compound, and the total concentration of the osmolality-increasing compound(s) is very high, preferably exceeding  $600 \text{ mOsm/dm}^3$ . The wetting fluid could either be arranged in contact with the hydrophilic surface layer of the catheter in the receptacle, for preservation of the hydrophilic surface layer in a wetted state during accommodation in said receptacle and provision of a ready-to-use catheter assembly, or be arranged to keep the wetting fluid separated from the hydrophilic surface layer of the catheter during storage, but to be brought into contact with said hydrophilic surface layer upon activation before an intended use of the catheter. A similar method and wetting fluid is disclosed as well. The provision of the osmolality-increasing compound in the wetting fluid provides several advantages per se, such as a improved properties of the hydrophilic coating, a more predictable and controllable wetting process, a more expedient and cost efficient production, etc. Further, the use of this very high concentration of osmolality-increasing compound in the wetting fluid has proven remarkably efficient.

Ink. t. Patent- och reg.verket

2003-12-22

Huvudfaxen Kasse

1/5

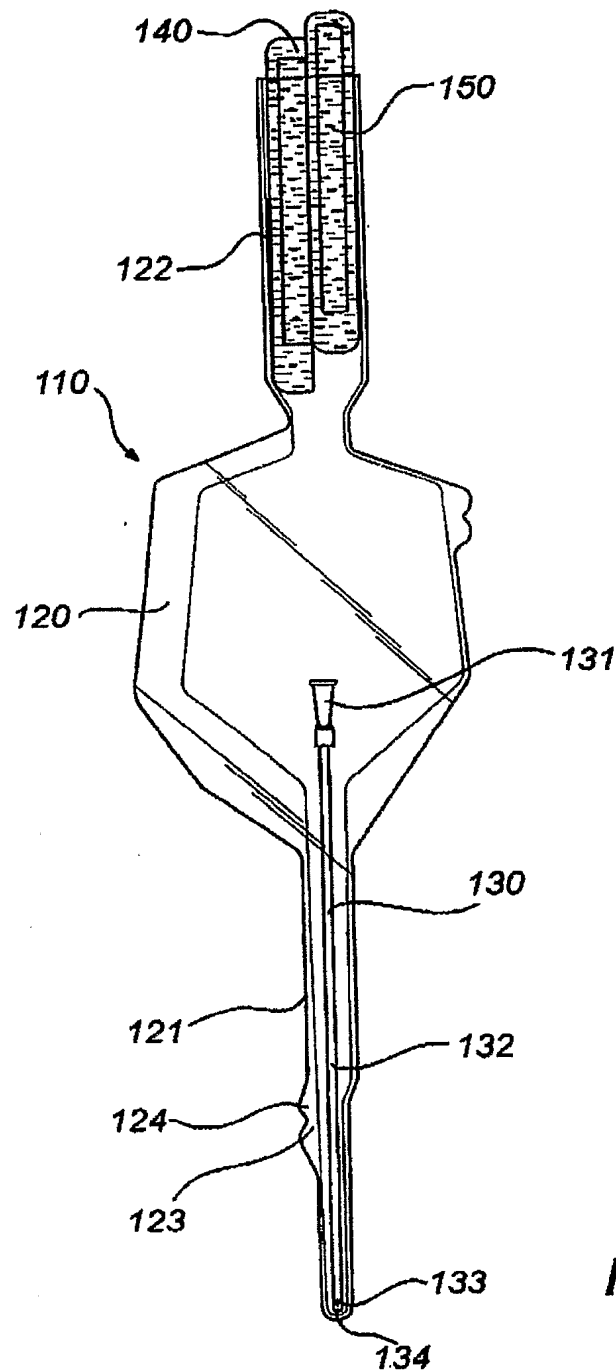


Fig. 1

2/5

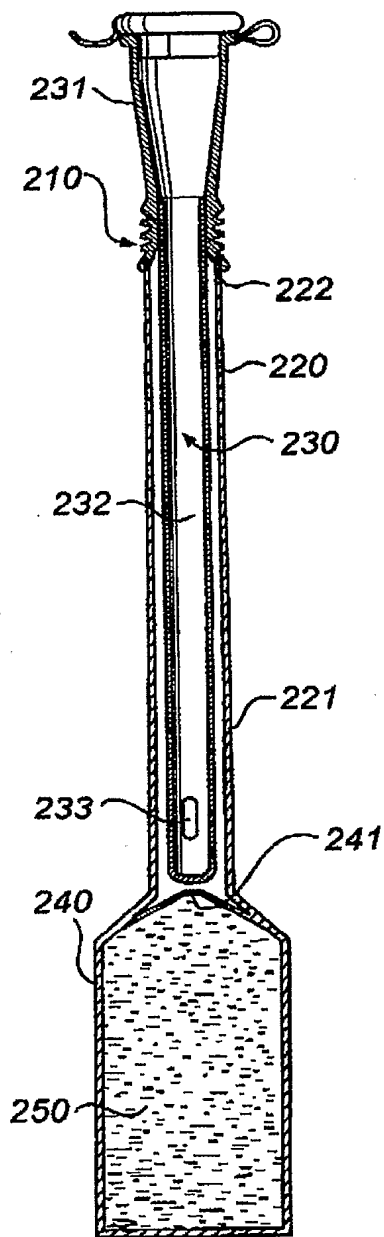


Fig. 2

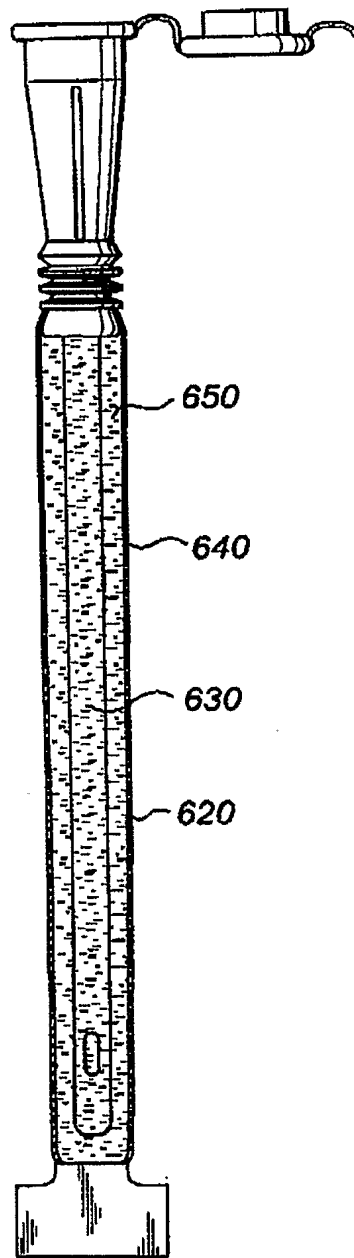


Fig. 6

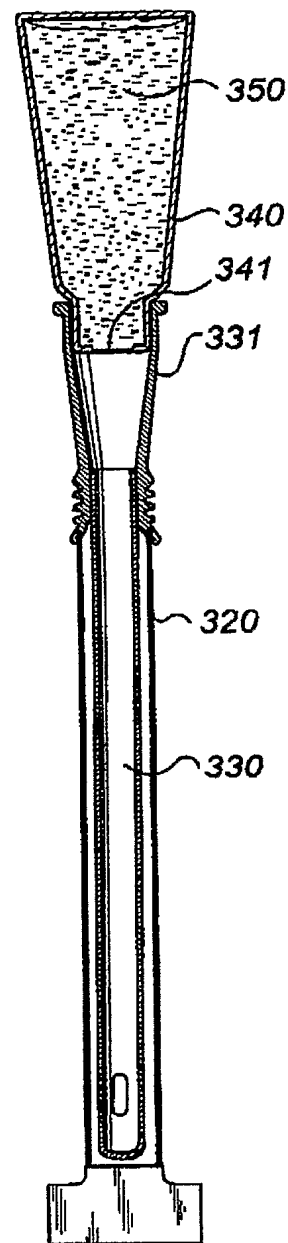


Fig. 3

Sv. t. Patent- och reg.verket

2003-12-22

Huvudfaxen Kåstun

3/5

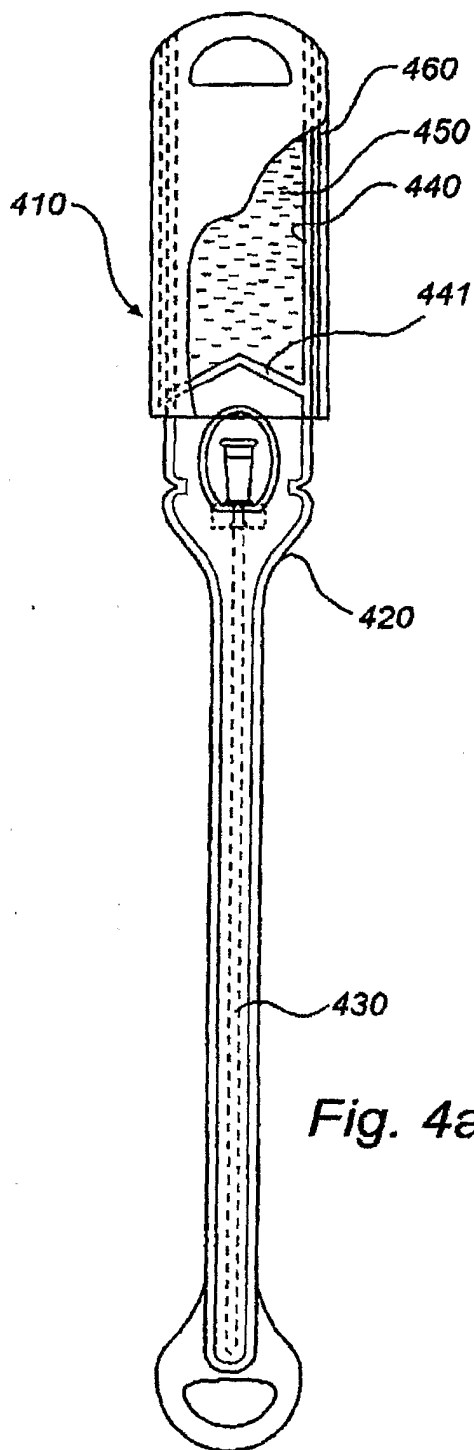


Fig. 4a

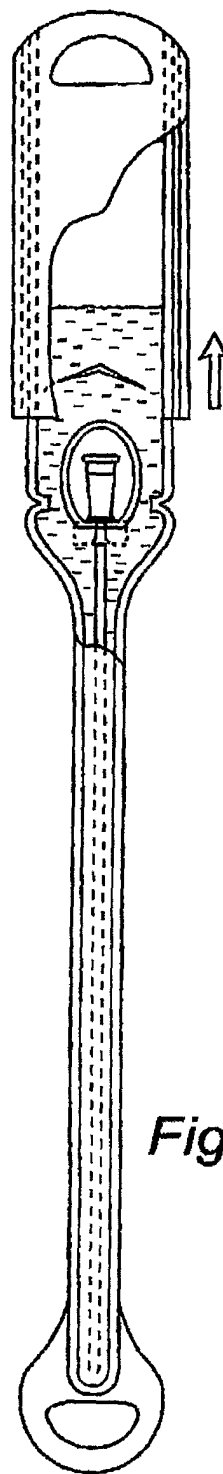


Fig. 4b

4/5

Stat. Patent- och reg.verket

2003-12-22

Huvudfaxen Kassen

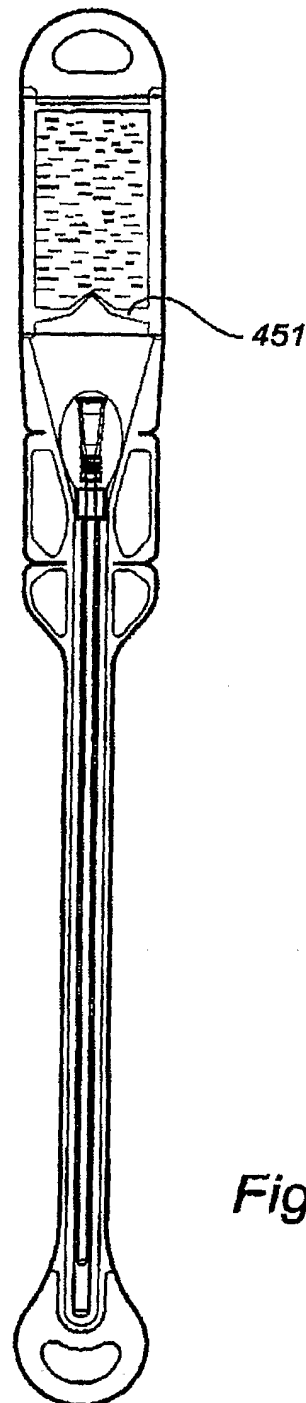


Fig. 5

Ink. t. Patent- och reg.verket

2003-12-22

Huvudföreläsning

5/5

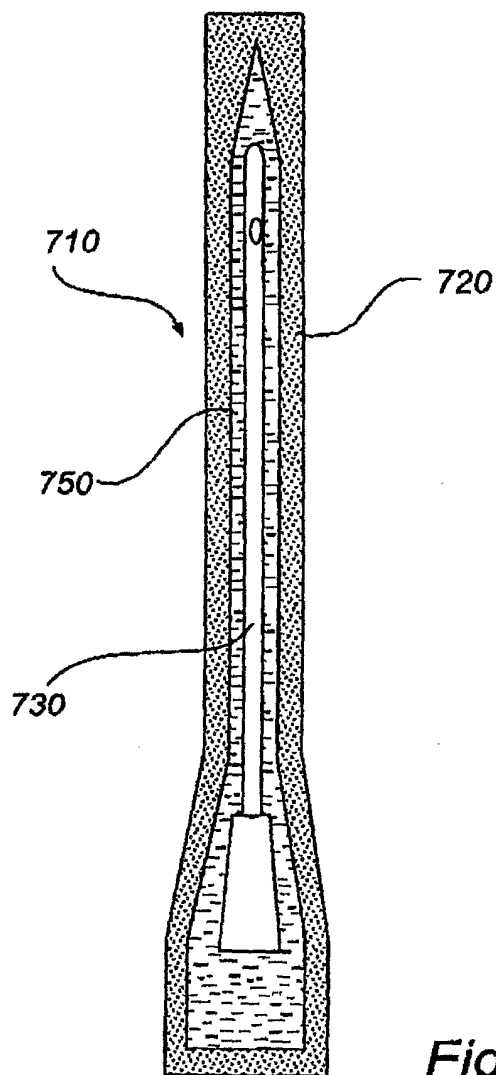


Fig. 7